

# WE MADE IT!!

We would like to thank all our dealers/contractors that believed in us, for trying our products, and working with our company. It is thanks to you that we now have dealers across North America. Yes we have grown, but we have remained true to our grass roots and are still a family run company.



Going back to our first year...we only had 3 products, a plastic paver edge, an aluminum paver edge, and spikes. We now offer a full line of products and shop the world to bring you accessories that we believe in and have tested extensively before offering them to you. Nobody should be a guinea pig in this business! Not you or your customers. Our products are tried, tested and true.

We are Surefoot Hardscape Products!



# How we began?

#### It started out as a simple idea.

Over the years, as installers and working with various types of paver edgings, we worked on improving and developing a design for paver edging that has an ELEVATED snip/cut brace that's off the ground. This design proves to save time when installing, eliminating the need to pre-measure and pre-cut allowing the installer to cut from above.

#### **AND THAT'S HOW SUREFOOT**



**EDGING WAS BORN!** 



CO	M.	ΤE	N.	TS

CONTINUE	
Surefoot Paver Edging	4
Sureflex Paver Edging	6
Aluminum Paver Edging	8
Aluminum Paver Edging - Low Profile	10
Plastic Garden Edging	11
Rockstar Garden Edging XS	12
Rockstar Garden Edging	13
Rockstar Garden Edging - Back in Black	14
Xtreme Bond	15
Foam-A-Grip / Inverted Marking Paint	16
Geogrid / The Wedgie	17
Waldo - Wall Drain Pro	18
German Hammers	19
Accessories & Tools	20
Lifting Equipment	22
Splitters	23
Lite On	24
Paver Spot	25
Slim Shady / Cyclops	26
EZLites	27

....



#### **DESIGNED BY INSTALLERS, FOR INSTALLERS!**

- What the professionals use and easy for the "Do-it-yourself-er" to install.
- Integrated connection system ideal for green roofs - no spikes or clips required.
  - Heavy duty construction: will not become brittle to weathering and lasts a lifetime.
  - Comes in straight form but can easily be worked with for curved applications
  - Ideal for garden beds, landscape beds, brick/stone patios, tree rings, and walkways.
    - Made from 100% recycled material and comes with karma!
- Super permeable to promote proper root growth and drainage which eliminates turf brown out.





"CUT ON THE GO" DESIGN.



ALLOWS EDGING TO BE CUT FOR CURVED APPLICATIONS.



WITHOUT
PRE-CUTTING OR
HAVING TO LIFT EDGING
OFF THE GROUND.




CROSS SPIKE
TECHNOLOGY MAKES THE
EDGING MORE RESISTANT
TO HEAVING UP FROM
GROUND FROST.



SPIKES CAN GO
ANYWHERE IN BETWEEN
THE CUT BRACE AND
EDGING WALL WHICH
HELPS TO DIMINISH
EDGE PULL AWAY WHEN
INSTALLING.



SUPER FAST BUILT IN CONNECTION SYSTEM. NO CLIPS NEEDED AND HELPS TO SAVE LABOUR TIME.



#### **INSTALLATION TIPS:**

#### Driveways:

Nail every 8" (20.3 cm) to 12" (30.5 cm).

For curved areas you can also double spike.

#### Walkways and Patios:

Nail every 12" (30.5 cm) to

20" (50.8 cm).

For curved areas you can also double spike.

#### SPECS:

8' length x 1"5/8 height

3" depth x 2.25" width

243.84cm length x 4 cm height

7.68 cm depth x 5.71cm width




# FLEXIBLE PAVER EDGING





# MORE BEEFY, HEAVY DUTY EDGING

- Easy installation.
- Save time No cutting required for curves.
- Ideal for driveways, patios, and walkways.
  - Made from 100% Recycled material and comes with Karma!

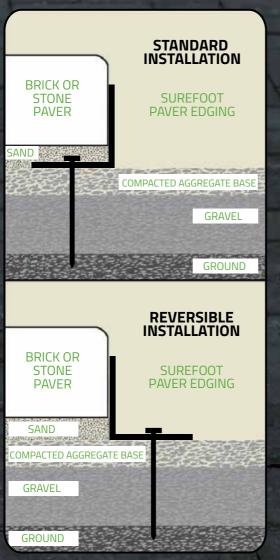

#### **INSTALLATION TIPS:**

**Driveways:** 

Nail every 8" (20.3 cm) to 12" (30.5 cm). Use Standard Installation Only.

Walkways and Patios:

Nail every 16" (40.6 cm) to 20" (50.8 cm) & at either end. Use Standard or Reversible installation.


**SPECS:** 

Length: 8' (243.84 cm) Height: 1.75" (4.445 cm) Thickness: .31" (7.874 mm)



- What the professionals use and easy for the "Do-it-yourself-er" to install.
- Heavy duty construction: will not become brittle to weathering and lasts a lifetime.
- Comes in straight form but can easily be worked with for curved applications/corners.
  - Tool-less to do curves, corners or straights.
- Can be installed both standard or reverse installation.
- Low profile so the edge is invisible when properly installed.
  - No wasted material due to overlap at joints.
    - Comes with plated joiner tabs.
    - Made from 100% recycled material and comes with karma!



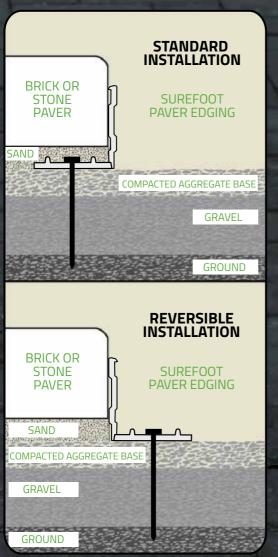

#### **INSTALLATION TIPS:**

**Driveways:** 

Nail every 8" (20.3 cm) to 12" (30.5 cm). Use Standard Installation Only.

**Walkways and Patios:** 

Nail every 16" (40.6 cm) to 20" (50.8 cm) & at either end. Use Standard or Reversible installation.

**SPECS:** 

**Length:** 8'-4" (254 cm) **Height:** 1.5" (3.81 cm)

Thickness: .125" (3.175 mm)





Our Lowest Profile Aluminum Edging is ideal for use with 20mm porcelain pavers, flagstone, wetcast shapes and bluestone. Our aluminum edging bends to your needs no matter how complex your design requirements. Made of aluminum, it's strong enough for straight lines, yet flexible enough to follow the most intricate curved patterns.

- Convenient 8' lengths
- Made of non-rusting Aluminum
- Completely hidden from view
- One piece for straight or curved patterns
- 90 degree angles without cutting
- Will not warp in heat or crack in cold
- No loss of material due to overlap at joints
- 100% Recycled Material & comes with Karma!

Length: 8' (2.44m) Height: 5/8" (17mm) Thickness: 0.125" (3.2mm) Flange: 1.5" x 4" (35mm x 102mm) Alloy: 6063 aluminum T-5 hardness US Patent







Professional Grade Garden Edge 100% Recycled Material & Comes With Karma!

TAKE

#### PLETINUM EDGE



Durable corrugated side wall construction with T-Shape flange allows for easy and secure installation.

\*NOTE - CONNECTORS ARE REQUIRED


#### PRIMO EDGE



Primo Edge was developed to offer quality and performance at an economical price.

\*NOTE - CONNECTORS ARE REQUIRED

#### SIMPLE EDGE



Patented design eliminates the need of a garden edger.
It's one time installation inhibits grass from growing onto walkways and concrete driveways, making this product Eco Friendly and a true time saver.

#### **Anchor Stakes**

9" x 1" Galvanized Steel 100 pcs per case

#### **Straight Connector**

6"

100 pcs per case

#### 90° Corner Connector

Durable Injection Mold 25 pcs per case








- Keyhole Interlocking System: Lengths are easily and quickly connected.
- Superior Reinforcement 8 ft lengths: Rigid enough to provide perfectly straight lines; flexible enough for the most demanding curves.
- No need to use heavier gauge or more costly material to maintain straight runs.
- Heavy duty 1 1/8" nail loops located every 23": allows for more frequent nailing positions, providing superior anchoring where required.
- Steel Nail Anchoring: Spiral 10" nails readily available.
- 100% Recycled Material & comes with Karma! 🦚





# **Rock Star 4" Professional Garden Edge**

- Ideal for both commercial and residential use
- EZ-Connect System saves labour time
- Heavy Duty/Beefy Edge so straight lines are easy
- Flexible to allow for perfect curves



Length: 8' (2.43m)
Height: 4" (10.1cm)
Thickness: 1/8" (3.2mm)

# **Premium Quality**

- Forget Plastic "Rolled" Big Box Edges
- 8 ft Lengths bigger sizes do not stay straight
- For Garden Beds, Tree Rings, Walkways, Patios
- 100% Recycled Material & comes with Karma! 🚓
- Non rusting Aluminum



## **Rock Star 4" Professional Garden Edge**

- Ideal for both commercial and residential use
- EZ-Connect System saves labour time
- Heavy Duty/Beefy Edge so straight lines are easy
- Flexible to allow for perfect curves

# Specs: Length: 8' (2.43m)

Height: 4" (10.1cm)
Thickness: 1/8" (3.2mm)

## **Premium Quality**


- Forget Plastic "Rolled" Big Box Edges
- 8 ft Lengths bigger sizes do not stay straight
- For Garden Beds, Tree Rings, Walkways, Patios
- 100% Recycled Material & comes with Karma! 🚓
- Non rusting Aluminum
- Durable black anodized finish

# **Extra Strength Adhesive**

**Premium Polyurethane** 










# Works on wet & frozen surfaces!! Don't believe us? Ask for a sample!!

- Quick adhesion and fast drying
- Works on concrete, brick, wood, metal, stone and fibreglass
- Works in all temperatures
- Premium Polyurethane
- VOC compliant
- Ideal for artificial turf
- Guaranteed to satisfy the highest of demands

10.5 oz 24 tubes per case 60 cases / 1440 tubes per pallet

29 oz 12 tubes per case 60 cases / 720 tubes per pallet



# FOAM-A-GRIP

FOAM-A-GRIP


Foam-A-Grip is a high quality adhesive based on modified polyurethane chemistry. It has been developed for use in commercial construction including subfloor assembly, interior drywall installation, SIPS panels, rigid foam insulation, EIFS systems, faux brick/blocks and natural stone. This adhesive has excellent long-term resistance to weathering, water, acids and solvents

#### FEATURES:

- 3 times stronger than typical construction adhesives
- A single 24-ounce can does the job of 6 to 10, 28-ounce tubes of other adhesives, reducing cost and waste
- 20-minute set time
- Aggressive adhesion for general construction and landscaping applications
- Low-temperature application
- Excellent adhesion to a wide range of substrates







1 CAN = APPROXIMATELY 6 LARGE TUBES OF 825ML CONSTRUCTION ADHESIVE (1/2" BEAD)

# INVERTED MARKING PAINT

#### Features:

- · Extremely bright
- Inverted tip
- Quick drying won't clog
- Water based safe on plants and grass
- Lead free



- Fluorescent Orange \$\frac{1}{2}\$
- Fluorescent Red \$
- Hot Pink 5
- ▶ White 妈





MPG33 - 33" Marking gun



MPG14 - 14" Marking gun



- Retaining Walls, Steep Slopes, Timber Walls, Paver Reinforcement, Landscape Repair
- ☐ Recommended For Wall Heights up to 6 ft
- ☐ Biaxial CMD 882 lbs / ft
- ☐ LTDS MD 822 lbs / ft
- 12 Rolls 4 ft x 50 ft / "Pop Off Top" Display
- Other Sizes:

Geo Grid 150 - 6' x 150' Roll - 45 lbs - 100 SQ. YDS

Geo Grid 200 - 6' x 300' Roll - 110 lbs - 200 SQ. YDS

Geo Grid 350 - 6' x 300' Roll - 130 lbs - 200 SQ. YDS





- $\blacksquare$  Load bearing up to 8,000 psi
- Weatherproof and will not rot, shrink, warp or split
- ☐ Easy break off points, amazing support and easy way to align
- UV treated so it will not become brittle
- Recommended for pavers, retaining wall caps, masonry, concrete and many other uses
- ☐ Injection molded sheets of 10 / 36 sheets per case

		HEEL	MID	TOE
EZ-SHIM		8,029 psi	7,993 psi	7,947 psi
CEDAR		1,367 psi	1,711 psi	5,370 psi
PINE	Barrier V	1.848 psi	2.288 psi	4.215 psi






# Designed for all 3" - 8" blocks.



- Easy installation
- Esthetically pleasing
- Reduced labour costs / No more cutting holes
- Height easily modified for use with any size block or timber
  - Male end snaps into 4" TEE
    - Case pack 12 pcs
- Available in Black, Grey or Beige

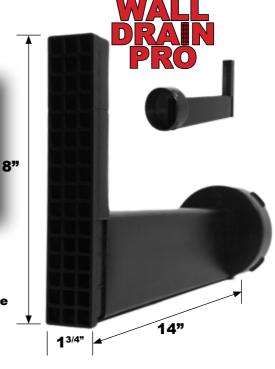



BLACK: SWD-BL GREY: SWD-GR BEIGE: SWD-BE

AVOID UNSIGHTLY DRAINS



#### **ALL HAMMERS CARRY A LIFETIME WARRANTY!!**



#### **Baseplex Paver Mallet STH-417**

The Universal Hammer

- Ash Wood Handle
- Zinc Die Cast Head
- 2" (50mm) Changeable Inserts
- · Overall Length 13.25"

#### Inserts included:

STH-417A:White - Nylon/Hard STH-417B: Red - Plastic/Hard





#### Paver Mallet STH-416

Perfect for Large Wall Projects

- 13" Hickory Wood Handle
- Cast Iron Head Casting
- 23/8" (60mm) Changeable Inserts
- · Overall Length 16"

#### Inserts included:

STH-416A: Black - Composite Rubber/Medium Hard STH-416B: Red - Plastic/Hard



3.5 Lbs



STH-419

- Ideal for Retaining Wall Cap/Stones • 19" Hickory Wood Handle
  - Cast Iron Head Casting
    - 31/8" (80mm) Changeable Inserts
    - · Overall Length 19.25"

#### Inserts included:



6.6 Lbs

STH-419A: Black - Composite Rubber/Medium Hard STH-419B:White - Nylon/Hard



#### Sledge Mallet STH-418

The Ultimate Sledge Mallet

- 31" Hickory Wood Handle
- 7lb Cast Iron Head Casting
- 31/8" (80mm) Changeable Inserts
- Overall Length 31.4"

#### **Inserts included:**

STH-418A: Black - Composite Rubber/Medium Hard STH-418B:White - Superplastic/Medium Hard



7.4 Lbs

Dead Blow 40mm; STH-420 70mm; STH-421

The Only Dead Blow to use

- · Hickory Wood Handle
- Two white nylon changeable inserts
- Overall Length 4" (40mm) 4.5" (70mm)



STH-420A: White - Nylon/Hard



STH-421A: White - Nylon/Hard





#### STH-411 Deluxe Paver Persuader

Galvanized steel handle Weight - 8 lbs 36" Handle



#### **STH-412 Double Headed Paver Mallet**

Galvanized steel handle Weight - 5.5 lbs 15" Handle

#### STH-414 Dead Blow

4 lbs. Case of 12



#### **STH-415 Rubber Mallet**

32 oz. Case of 24





Good for screeding sand or concrete. Clamp/Handle set-up is fully reversible giving you 2 screeds in 1.

Designed screeding edge for cleaner finish on your job.

The handle gives you better leverage for screeding larger loads.

Made from high tensile aluminum, so it resists bending.

# Now Available in USA!

#### SIZES:

I.2M - 3' I I"

1.8M - 5' 10"

2.4M - 7' 10"

#### Aluminum SSR-210 Screed Rail



#### Aluminum SSR-211 Screed Bar



4'

Super Light Hollow I" x 4" 6' 8'

#### Chisels Ideal for Brick - Case of 12 SCL-211 3"

SCL-212 4"







Rubber/Latex Coated Palm Available by the Dozen. XL Only Case of 30



#### SPB-311

Paver Extractor Adjustable 4" - 10"

#### **SPB-312**

Paver Aligning Bar

**SPB-313** Paver Lifter Small from 0"-21"

**SPB-314** Heavy Duty Paver Lifter from 16"-27"

#### **Caulking Guns**

Heavy Duty Construction

STC-221 9" Case Pack 24 STC-222 13" Case Pack 12



#### Stiff Bristle / Exterior Broom

**SLB-18** 18" **SLB-24** 24"



#### Landscaping / Grading Rake

**SLR-30** 30" 36" **SLR-36** 

**SLR-42** 42" **SLR-48** 48"



### **ADJUSTABLE (FINISHING) ALUMINUM**

SAND SCREED







#### **Sections Clamp**

With the versatile lifting range of 9"-42"and a safe working load of 1600 lbs., this clamp is capable of picking up 1-2 sections of pavers at a time. The 1002 is perfect for separating cubes of pavers and handling materials on site.

Fork Yoke Attachment available.

Made in Canada.



#### Jed Clamp It/ Tread/Curb Clamp

J900	4"-22" max width	900 lbs
J2400	8"-32" max width	2400 lbs
J3000	12"-42" max width	3000 lbs



	Capacity	Rise	Depth
T600	600 lbs	6"-8"	12"-25"
T1200	1200 lbs	6"-8"	20"-35"

#### **Tread Setter**

Eliminate finger smashing, back breaking, time consuming and work-related injuries using the new TREADSETTER. The Treadsetter is designed to handle various step treads from 12"-35" in depth – up to 4" in width and with a 6"-8" rise. This new product is easily adjusted to tread width and balance. The tool has pivot-style urethane ends to reduce slippage and protect the stone, as well as servicing other applications in various weather conditions, Ideal for Rosetta Stone.



#### Montolit Curb Clamp

Mechanical or hand-lifter. 3.15"-7" 440lb capacity



#### STH-424 Curb Lifter

Adjustable 1/2" - 10" Weight - 10 lbs

#### STH-425 2 Man Curb Lifter

Adjustable 19.5" - 43" Weight - 25 lbs

Detachable for Skid Steer/Bobcat







#### **Paver Cart**

Lifts a complete band of pavers at one time. Saves time, money and labour. Less handling reduces chipping and breaking of materials and speeds up installation.

#### FEATURES:

- · Large pneumatic turf-profile tires · solid steel pallet roller
- · Handle assembly detaches for easy transport
- Reinforced cross-braced handles prevent twisting
- · Foot bar for increased leverage
- · Can be used for both palletized/unpalletized materials
- Shipping weight: 165 lbs. Overall dimensions: 40" x 21" x 69"
- Safe Lifting Load: 600 Width adjusts from 34"-40"





STH-422

**BK43 Paver Splitter** 

Blade cutting length 13" Cuts from 0" - 4.33" Weight 62 lbs.





#### **6L Paver Cutter STH-423**

- Designed and constructed specifically for splitting pavers and retaining wall block
- · Lightweight and easy to transport, yet heavy duty quality
- · Quick and efficient way to get the job done
- Will cut up to a 3.9" paving stone

#### SPECS:

CUT WIDTH: 12.2" CUTTING HEIGHT: 0 - 3.9" WEIGHT: 66LBS



#### SF 3300

Fixed hardened galvanized knife, 4 edges Cutting Width 13" Cutting Height 1/2" - 6" - Concrete Pavers Weight - 80 lbs 2 spindles to adjust height Holding plate Spring Loaded Cut



#### SF 4300

Fixed hardened galvanized knife, 4 edges Cutting Width 17" Cutting Height 1/2" - 13" - Sand Lime Stone Cutting Height 1/2" - 6" - Concrete Pavers Weight - 125 lbs 2 spindles to adjust height Holding plate Spring Loaded Cut







**FEATURES** 

20,000 Hour Lifespan

**Energy Efficient - 1.9 Power Watt That Emits "Warm" Light** 

30 SMD High Output LED's Per Fixture

5 Year Warranty (When Used With Approved DC Transformer)

Waterproof Design - 1P66 Rating\*

**UV Treated Polycarbonate Lens - Will Not Brown Or Yellow Quick And Easy Installation - Comes With 6ft Lead Wire** 

30 Year Warranty On Corrosion Resistant Powder Coated Finish **Heavy Duty Die Cast Aluminum Body** 

#### **DIMENSIONS**

7<sup>1/4</sup>" Wide x 3/4" Tall x 1" Deep

**Available Colors:** 











Bronze Sparkle

Classic Brown

# PAYERSPOI

#### **PAVER SPOT**

- Waterproof and submersible
- Energy efficient and emits a "warm" light with a durable polycarbonate shell
- Suitable for driveways, walkways, steps, decks, docks and more
- 10 year warranty, 100,000 hour rated
- 1.5 Watts, 1" Diameter, Height 5/8", 6' lead wire Available in 4 spot packs or complete kit (contains 8 spots, 60 Watt Transformer, Timer, Gel Caps)

#### DC TRANSFORMERS

- 36, 60, 100 watt versions
- DC specific constant even power supply
- 3 year warranty
- Waterproof (IP66) suitable for indoor or outdoor use
- Over voltage and thermal protection
- UL and ETL Safety rated

#### **AC TRANSFORMERS**

- 60 and 100 watt versions
- 5 year warranty
- Waterproof (IP66) suitable for indoor or outdoor use
- Over voltage and thermal protection
- UL and ETL Safety rated
- Built in photocell / timer

#### **PHOTOCELL TIMER**

- Indoor or Outdoor use
- Multiple time on/off settings
- 1 yr warranty
- · Photo activated for hassle free on/off

#### **LOW VOLTAGE WIRE**

• Outdoor Rated, UL approved

16 Gauge Wire - 100' rolls - Suitable for runs over 75' 18 Gauge Wire - 100' rolls - Suitable for runs under 75'

#### **OUTDOOR GEL WIRE NUTS**

- UL approved
- 10 per pack



















- 6 led x 20 lm per led = 120 lumen
- Wattage 2.4W
- Warm White: 2725 ± 70 °K
- Wire length: 1.5 m (4' 11")
- cETL
- 12V AC/DC
- Fully assembled units available in Black and Grey
- Dimensions 6<sup>7/8</sup>" wide x 3/4" tall x 1" deep




- Voltage 12V AC/DC
- Wattage 0.4W
- # of LEDs 6
- Beam degree 90°
- Frosted Lens
- Brushed Nickel metal trim
- Color Temperature : 2725 ± 70 °K
- Dimensions 1.25 x H.73in (30.5x H18.5mm)
- Lumens 25
- IP Rating 66 Indoor/Outdoor
- Certification cETLus











## High Power, Adjustable Accent Light

- · Includes: 17W, 1100 lumens, 3000K
- · Power can be dialed down to 3W, 250 lumens
- · 20° to 60° adjustable beamspread
- Humidity evacuation system
- P65
- · Includes a 12" aluminum spike
- Louver included
- Rugged brass construction
- Bulb included
- 5 Year warranty









MR16 MR08 Bi-pin Flood







- Sturdy brass MR16 accent light
- Angled glare shield length adjustable from 130 mm to 155 mm
- No tools required to relamp, aim the luminaire or adjust the glare shield.
- · Stake included
- Lamp not included. See page 28 for a selection of MR16.
- · 5 year warranty

- Sturdy brass MR08 accent light
- Angled glare shield length adjustable from 80 mm to 110 mm
- No tools required to relamp, aim the luminaire or adjust the glare shield.
- · Stake included
- Lamp not included. See page 28 for a selection of MR08.
- · 5 year warranty

- · Sturdy brass mini flood
- 2.5W, 3000°K, LED bi-pin already installed in the fixture
- · G4 socket
- Bulb included
- Stake Included


EZL103AB EZL102AB EZL104AB





- Sturdy brass construction
- 2.5W, 3000°K, LED bi-pin already installed in the fixture
- Stake included
- 5 year warranty

EZL106AB EZL106BBK



- Sturdy brass construction
- 2.5W, 3000°K, LED bi-pin already installed in the fixture
- Stake included
- 5 year warranty

EZL105AB EZL105BBK





- · MR16 aluminum accent light
- Angled Glare Shield
- Stake Included
- Lamp not included. See page 28 for a selection of MR16.
- 5 year warranty

EZL101BZ EZL101BK





5 year warranty



5 year warranty





#### Transformer: 75W

- 75W Transformer
- Sturdy stainless steel built
- Output taps: 12 and 15 Volts
- Built-in mechanical timer and photocell plug
- Epoxy encapsulated toroid coils for higher efficiency and lower heat generation
- · Thermal protection with auto-reset on the primary side
- · Secondary side magnetic circuit breaker
- · Drop down bottom
- 10 year warranty

#### 75W Model



#### Transformer: 150W, 300W & 600W

- · Sturdy stainless steel built
- Output taps: 12, 13, 14 and 15 Volts
  - Timer and photocell plugs
- Room for most commonly used timers
   Removable, lockable hinged door
- Large, robust terminal block
- Drop down bottom
- Epoxy encapsulated toroid coils for higher efficiency and lower heat generation
- Thermal protection with auto-reset on the primary side and secondary side magnetic circuit breaker
- Multiple knockouts
- 10 year warranty





Dowt #	Watta	Dime	Toma		
Part #	Watts	а	b	С	Taps
EZLT7a5	75	170	110	115	12 & 15
EZLT150	150	295	153	140	12, 13, 14 & 15
EZLT300	300	325	155	140	12, 13, 14 & 15
EZLT600	600	365	170	170	12, 13, 14 & 15

Lamp	Base	Volts	Product #	Watts	Beamspread	Color	Lumens	CRI	Avg. Life	MOL
MR16	GU5.3	12	EZL219	4	30°	3000°K	310	80+	25 000	50 mm
	4114		EZL220	4	45°	3000°K	310	+08	25 000	50 mm
- 4	0		EZL221	4	60°	3000°K	310	+08	25 000	50 mm
1	6		e	FC ·	5 year warranty					

Lamp	Base	Volts	Product #	Watts	Beamspread	Color	Lumens	CRI	Avg. Life	MOL
MR16	GU5.3	12	EZL240	7	45°	3000°K	475	+08	25 000	50 mm





Bateriek 5 year warranty

Lamp	Base	Volts	Product #	Watts	Beamspread	Color	Lumens	CRI	Avg. Life	MOL
MR08	GU4	12	EZL201	2.5	30°	3000°K	160	80+	25 000	36 mm
	A		EZL202	2.5	80°	3000°K	160	<del>80+</del>	25 000	36 mm





□ FC · 5 year warranty



		Louver		
Part #	Source	Cell Dia	Depth	Cut-Off
EZR16	MR16	1/4"	.235"	45°

Lamp	Base	Volts	Product #	Watts	Beamspread	Color	Lumens	CRI	Avg. Life	MOL
T3	GU4	12	EZL301	2.5	360°	3000°K	250	80+	25 000	32 mm









1.877.442.4457 WWW.SUREFOOTEDGING.COM INFO@SUREFOOTEDGING.COM Follow us on:







You Tube